
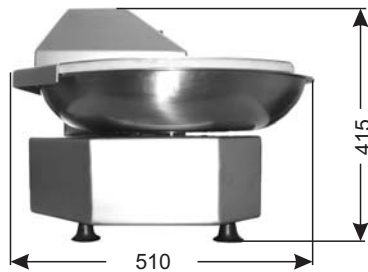


SCHARFEN

Food Cutter stainless steel

Allzweck Kutter Edelstahl

Modell TC 11

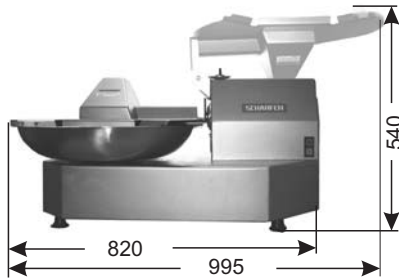

Technische Daten

Aufstellfläche

(L x B): 670 x 370 mm

Außenmaß

bei geschlossenem Deckel

(L x B x H): 820 x 510 x 415 mm

bei geöffnetem Deckel

(L x B x H): 995 x 510 x 540 mm

Gewicht ca. 55 kg

Spannung

wahlweise 400 V Drehstrom

oder 230 V Wechselstrom

die 2-Gang Ausführung ist nur

in Drehstrom lieferbar

Leistungsaufnahme

1-Gang-Ausführung ca. 1,2 kW

2-Gang-Ausführung ca. 1,2 / 1,5 kW

Geräuschpegel <70 dB (A)

Messersatz

Standardausführung

mit 2-er Messersatz

gegen Aufpreis auch

mit 3-er Messersatz



Kutterschüssel

Inhalt 11 Liter, aus rostfreiem Edelstahl, durch Freilauf auch bei stehender Maschine drehbar, daher gefahrlos und einfaches Entleeren und Reinigen. Geschwindigkeit der Schüssel ca. 14 U/min.

Hohe Schneidgeschwindigkeit

	1-Gang Schnitte pro Minute	2-Gang Schnitte pro Minute
2-er Messersatz	ca. 2840	ca. 2840 & 5680
3-er Messersatz	ca. 4260	ca. 4260 & 8520

Technical Data

counter space required

(l x w): 670 x 370 mm

overall dimension

with closed lid

(l x w x h): 820 x 510 x 415 mm

with open lid

(l x w x h): 995 x 510 x 540 mm

weight approximately 55 kg

voltage

3-phase or 1-phase,

voltage and cycles as required

2-speed execution only in

3-phase

power requirement

1 speed machine app. 1.2 kW

2 speed machine app. 1.2 / 1.5 kW

sound level <70 dB (A)

knife assembly

standard execution

with 2-knife-assembly

3-knife-assembly

at an extra charge



cutter bowl

content 11 litres, made of stainless steel, because of free wheel bearing the bowl is turnable when the machine is switched off, therefore it can easily and safely be emptied and cleaned.

Speed of the bowl: app. 14 rpm

high cutting speed

	1-speed cuts per minute	2-speed cuts per minute
2-knife assembly	app. 2840	app. 2840 & 5680
3-knife assembly	app. 4260	app. 4260 & 8520

Model TC 11 is available in following special executions:



TC 11 Combi

With second gear for attachments.

**Not allowed for countries
restricted to CE regulations.**

Further information upon request.